


oerlikon
barmag

VarioFil® I

Technical data

Dimensions

Very flexible compact spinning line
for the production of industrial high
tenacity yarn (IDY)

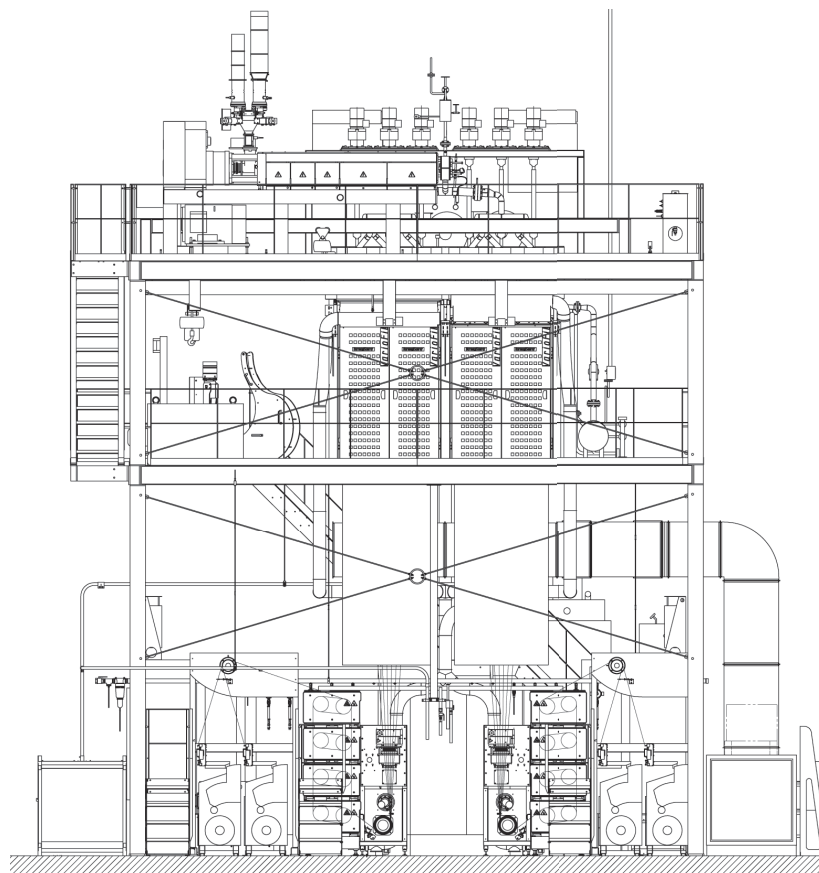

polymer*	Polyester (PET) or Polyamide (PA)
capacity PET or PA	up to 240 kg/h
no. of extruders	1
no. of yarn ends	2 x 6 or 4 x 3 or 4 x 6
no. of yarn ends on one winder	3 or 6
available stroke	170 mm or 250 mm
titer range (final)	500–3000 den
spin pack size	determines the final denier range
dimensions (W x D x H)**	11 m x 8 m x 12 m**
winder	ACW 4IY
godets	HF 220/400, e-save labelled

* other resins on request

** approximately depending on material dosing and drying system

Oerlikon Barmag

Zweigniederlassung der
Oerlikon Textile GmbH & Co. KG
Leverkuser Straße 65
P.O. Box 11 02 40
42862 Remscheid
GERMANY
Phone +49 21 91 67-0
Fax +49 21 91 67-12 04
info.barmag@oerlikon.com

The information supplied in this brochure is for guidance only.
We reserve the right to modify it at any time.

Reprint only with expressed permission of Oerlikon Barmag

OBA 222 a / 09/2016
Studio 45
Subject to changes