


VarioFil[®] T POY-FDY

Technical data

Dimensions

Very flexible compact spinning line for the production of textile partially oriented (POY) or fully drawn yarn (FDY)

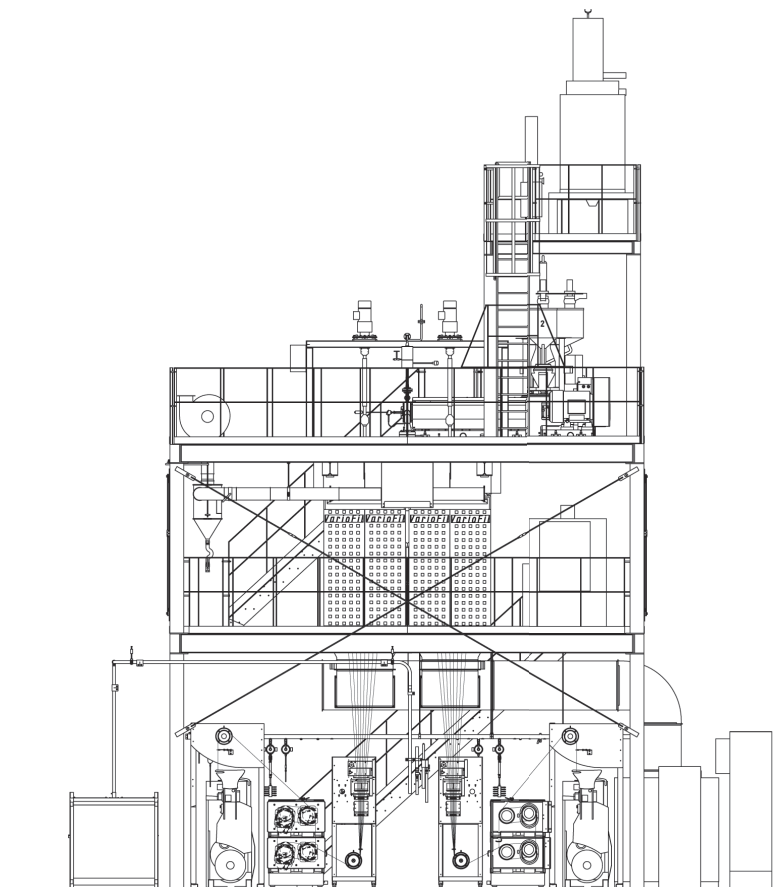

polymer*	Polyester (PET) or Polyamide (PA)
capacity PET	up to 220 kg/h
capacity PA	up to 120 kg/h
no. of extruders	1 or 2
no. of yarn ends	2 x 10 or 2 x 12
no. of yarn ends on one winder	10 or 12
available stroke	120 mm or 97 mm
titer range (final) PET	30–300 den
titer range (final) PA	20–150 den
spin pack size	determines the final denier range
dimensions (W x D x H)**	11 m x 6 m x 12 m**
winder	WINGS 48T
godets	HF 220/400

* other resins on request

** approximately depending on material dosing and drying system

Oerlikon Barmag

Zweigniederlassung der
Oerlikon Textile GmbH & Co. KG
Leverkuser Straße 65
P.O. Box 11 02 40
42862 Remscheid
GERMANY
Phone +49 21 91 67-0
Fax +49 21 91 67-12 04
info.barmag@oerlikon.com

The information supplied in this brochure is for guidance only.
We reserve the right to modify it at any time.

Reprint only with expressed permission of Oerlikon Barmag

OBA 222 g / 09/2016
Studio 45
Subject to changes