

Metco™ IIoT

You can only manage what you can measure

Create more value from your thermal spray systems with Metco[™] IIoT. Connect your thermal spray systems to an Industry 4.0 platform and build the foundation for data analysis and monitoring.

1 General Description

Oerlikon Metco IIoT enables you to improve your production process and enables an easier, faster and more efficient operation. Your company benefits from access to machine data improving availability, reducing scrap rate and increasing throughput.

- Possibility to consolidate process related machine data from one or multiple systems for easy access
- Access to raw data for further analysis in case of quality issues
- No need to physically access one or multiple machines
- Enables customers to locally store and centralize data to extract raw data for historical analysis and quality control purposes, or optionally in the Metco IIoT cloud service.

Metco IIoT allows transmission of relevant process data using OPC UA protocol.

The following data a is transmitted in one second intervals:


- Current
- Voltage at power supply
- Voltage at gun
- Power (net)
- Primary process gas flow
- Secondary process gas flow
- Shroud gas flow
- Cooling gas flow
- Cooling water flow
- Cooling water conductivity
- Kerosene back pressure

- Air jet
- Silvent air knife
- Feeder carrier gas
- Feeder hopper pressure
- Feeder vibrator pressure
- Feeder disk speed
- Feeder stirrer speed
- Feeder powder flow
- Machine status
- Info, warning and alarm messages, machine statuses




^a available data dependent on actual system configuration


Metco IIoT Connectivity

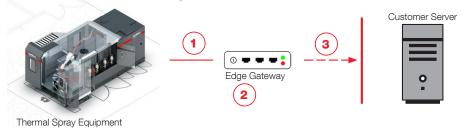

Metco IIoT Insights - Single system

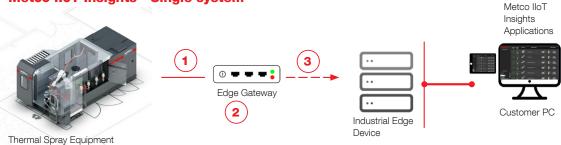

Metco IIoT Insights - Multiple systems

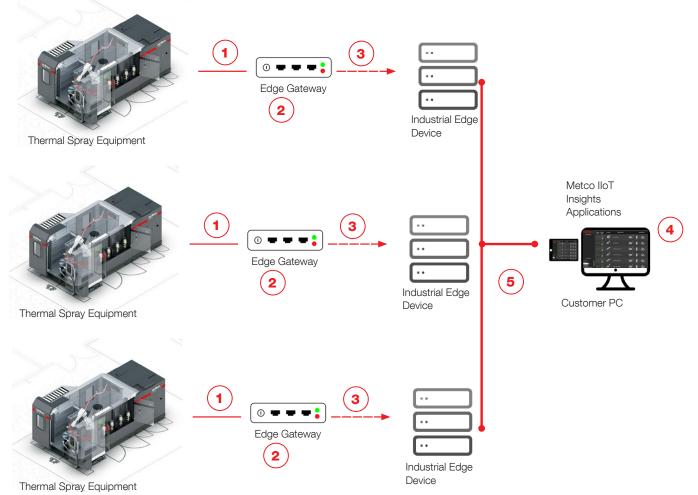

- 1. HTTPS protocol is used to secure communication between the Metco IIoT device installed in the Metco machine and the cloud platform.
- 2. All inbound ports blocked. (except OPC-UA Server port for on-premises data collection)
- 3. Secured and patched Operating System
- 4. 2FA (Two-factor Authentication) for user access.
- 5. One-directional data transfer.

2 Features and Benefits

Efficient

- Data at your hands
- Data generated and accessible in real time
- Improve performance of maintenance and service

Economical

- Plug and play solution
- Directly embedded into existing equipment
- Remote monitoring and maintenance of the Metco IIoT Edge Gateway (Internet connection required)
- Increase uptime, decrease downtime

Effective

- Quickly identify downtimes
- Identify irregularities
- Continuous recording of your production process

Environmental

- Reduce your scrap rate
- Improve quality
- Understand consumption of resources to optimize their use

3 System Options

3.1 Metco IIoT Connectivity

Metco IIoT Connectivity enables seamless, real-time access to all available machine data through an industrial edge gateway embedded in the process control center. Acting as an OPC-UA server, it transmits data at 1-second intervals to any OPC-UA client within the customer's network. This plug-andplay solution is available both as a retrofit and with new equipment, providing a robust foundation for data-driven improvements in productivity, efficiency, and quality.

3.2 Metco IIoT Insights

Metco IIoT Insights is our proprietary on-premise platform for local storage, analysis, and visualization of machine data. It aggregates raw data and computes higher-level metrics such as parts produced, coating runs per part, and contextual links to machine messages. A Windows-based application—easily installed via executable file—connects to the industrial PC inside the thermal spray system, providing secure access from any PC within the customer's network.

In parallel, both raw and enriched data can be streamed to the customer's data lake, enabling deeper integration into enterprise-level analytics. With Insights, customers benefit from our domain expertise in thermal spray and gain access to specialized analytics tools while maintaining full ownership and flexibility over their data.

4 Retrofits

4.1 Connectivity

Upgrade Kit ^a		Order Number
UniCoatPro	Edge Gateway Hardware Activation Fee	2362914 2429584
MultiCoat ^b	Edge Gateway Hardware Activation Fee	2367648 2429584
MultiCoatPro ^c	Edge Gateway Hardware Activation Fee	2367649 2429584
MP200 Pro	Edge Gateway Hardware Activation Fee	2367560 2429584

^a Any associated costs to upgrade existing equipment to reach minimum requirements (See section 5.1 Platform Compatibility) are excluded and must be purchased separately. Consult with MCH-product-support@oerlikon.com to assess total cost of retrofit.

b Limited to Atmospheric thermal spray Consultation with MCH-product-support@oerlikon.com for Controlled Atmosphere Systems (LPPS, VPS, LVPS)

^c Consultation with MCH-product-support@oerlikon.com to determine location installation prior to ordering.

4.2 Insights

To use Metco IIoT Insights, customers must purchase the Industrial Edge Device (IED)—a compact, industrial-grade computer equipped with an Intel® Core™ i7 1.8 GHz processor, 4×4 GB DDR4 RAM, and a 320 GB 3D-Flash SSD. The annual license is delivered on a USB dongle that must be inserted into the device. Once activated, the license validity period begins automatically and is tracked internally by the system.

Ongoing Value Through the Annual License


The annual license fee for Metco IIoT Insights goes far beyond a typical service model—it ensures the platform remains continuously updated, secure, and future-ready. Customers benefit from regular software patches, compatibility updates aligned with our thermal spray controller roadmap, and access to newly developed features. Our development focus includes intelligent alerts and machine health diagnostics that support predictive maintenance and reduce unplanned downtime. By keeping the platform up to date and continuously adding capabilities, we help customers maximize productivity, efficiency, and coating quality over time.

Upgrade Kit ^a	Order Number
Industrial Edge Device ^b	2456952
1year On-Premise License ^c	2457397
1year Cloud License ^d	2457398


^a Prerequisite installation of Metco Connectivity

4.3 Metco IIoT Insights User Interface

An optional web interface allows user with proper permissions to globally access the data of one or multiple systems from their workstation computer or a tablet with a compatible web browser.

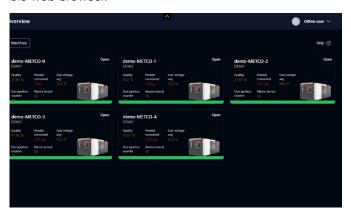

Overview

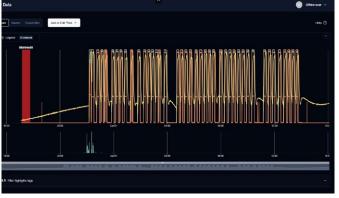

Raw Data

- Dashboard
- Data hub
- Analytics
- Quality report



Dashboard



Analytics

^b retrofittable in existing Process Control Centers

 $^{^{\}rm c}$ license ships with a USB stick

^d does not require industrial edge device. Internet only and Metco IIoT connectivity required

5 Technical Data

5.1 Spec	ifications	Connectivity	Insights	
Power Requir	rements			
Input Voltage		24 VI	24 VDC a	
Device Conne	ectors			
Wired		USB 2.0, RS232, RS485, 2 Ethernet ports	3 Ethernet ports, 4x USB 2.0, 1 Display Port	
Wireless		N/A		
Software				
Operating Syste	em	netFIELD OS	Linux	
Application		Metco IIoT Edge	IIoT Core	
Communication	Protocol	OPC-UA standard protocol	Rest-API	
Data				
Туре		time series data		
Resolution		1 second		
Storage		none	+20 years	
Protocol				
		OPC-UA for data connectivity, HTTPS for cloud connectivity		
Environment				
Temperature		-20 to 60 °C	14 to 140 °F	
Humidity		< 90%, non-condensing		
Metco IIoT Co	onnectivity Compatibility			
UniCoat3 / Mult	tiCoat5			
HMI Version		2.4		
MultiCoat				
HMI Version		V10_13a_3926 V8_34a_3929		
UniCoatPro				
HMI Version		A5.1.1		
MultiCoatPro				
HMI Version		V1.20.1		
MP200 Pro				
HMI Version		V4.1		
Metco IIoT In:	sights Compatibility	1.18		

^a Supplied through the existing controller - installed inside your existing thermal spray controller

