

# Material Product Data Sheet

## Pure Titanium and Titanium Alloy Powders

**Powder Products:**  
**Metco™ 4010 series, Metco 4016 series,**  
**Metco 4030 series**

### 1 Introduction

Oerlikon Metco's titanium and titanium alloy powders produce coatings having a range of characteristics not found in any other thermal spray powder materials. The coatings are light in weight with high strength-to-weight ratio and resistant to most corrosives. Titanium readily combines with other metals to form useful alloys. Owing to these suitable mechanochemical properties, pure titanium and titanium alloy powders can be employed in a number of applications via chemical, powder metallurgy and thermal spray processes.



Thermal spray coatings of titanium-based materials are commonly used in medical applications where biologic compatibility is required. Additionally, these coatings may also be used as a potential bond coat for hydroxylapatite coatings that are often used as a top-coat on biomedical implants. Titanium powders may also be used to produce dense, corrosion resistant coatings. Titanium powders have strong affinity and reactivity with oxygen, hydrogen and nitrogen at high temperatures. Most of the thermal spray coatings from these powders are produced under controlled atmosphere conditions (low pressure or soft vacuum).

#### 1.1 Typical Uses and Applications

- Biomedical applications (coatings on prosthetic implants)
- Corrosion resistant coatings
- Bond coat for hydroxylapatite coatings
- Metal injection molding applications
- Cold and hot isostatic pressing applications
- Cold spray applications

#### Quick Facts

Classification	Titanium based
Chemical formula	Ti 99.5+ or Ti 6Al 4V
Manufacture	HDH (hydride-dehydride) or Atomization
Morphology	Angular / Blocky
Apparent density	1.8 – 2.5 g/cm <sup>3</sup>
Melting point	1649 (3000 °F)
Service Temperature	≤ 400 °C (750 °F)
Purpose	Corrosion resistance, biocompatibility
Process	ChamPro™ (LVPS, LPPS, VPS), Cold Spray, Metal Injection Molding (MIM), Hot Isostatic Pressing (HIP)

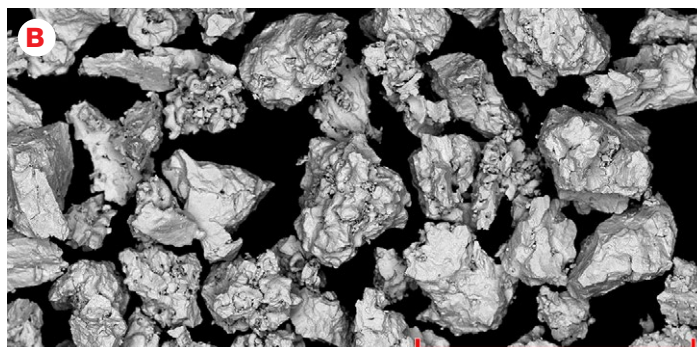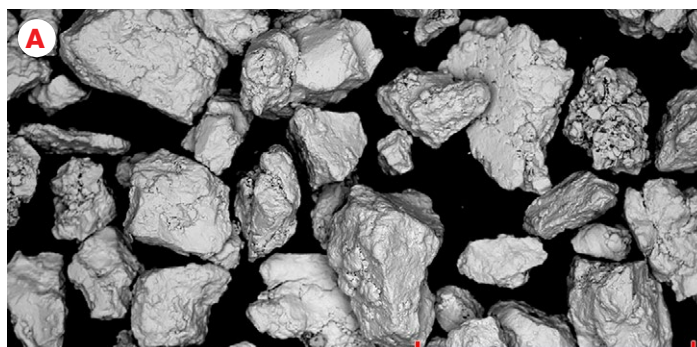

Typical powder morphologies.

**A:** Powder from wrought raw material. **B:** Powder from sponge (Kroll) raw material.

## 2 Material Information

### 2.1 Chemistry

Product	Nominal Chemical Composition (wt. %)														
	Ti	Al	V	Fe max	C max	H max	O max	N max	Cu max	Sn max	Y max	Si max	Cl max	Mg max	Na max
<b>CP Ti Grade 4</b>															
Metco 4010 series	Bal.	---	---	0.50	0.08	0.015	0.40	0.05	---	---	---	---	---	---	---
Metco 4016 series	Bal.	≤0.05	---	0.15	0.03	0.03	0.40	0.02	---	---	---	0.04	0.20	0.20	---
<b>Ti 6Al 4V Grade 5</b>															
Metco 4030 series	Bal.	5.50 – 6.75	3.50 – 4.50	0.30	0.08	0.015	0.20	0.05	0.10	0.10	0.005	---	---	---	---

### 2.2 Particle Size Distribution, ASTM Grade, and Other Properties

Product	Nominal Particle Size Distribution <sup>a</sup>		Grade (ASTM)	Manufacturing Method <sup>c</sup>	Morphology
	µm	mesh (ASTM) <sup>b</sup>			
Metco 4010E	-350 +200	-350 µm +200 µm	Grade 4	HDH – wrought	Angular / Blocky
Metco 4010D	-250 +90	-60 +170			
Metco 4010A	-90 +22	-170 mesh +22 µm			
Metco 4010C	-45 +11	-325 mesh +11 µm			
Metco 4016A	-180 +75	-80 +200	Grade 5	HDH – Kroll sponge	Angular / Blocky
Metco 4016B	-125 +90	-120 +170			
Metco 4016D	-45	-325			
Metco 4016F	-350 + 200	-350 µm +200 µm			
Metco 4030A	-250 +150	-60 +100	Grade 5	HDH – wrought	Angular / Blocky
Metco 4030B	-180 +75	-80 +200			
Metco 4030C	-106 +45	-140 +325			

<sup>a</sup> Analysis of particle size 45 µm (325 mesh) and above via sieve; analysis; particle size less than 45 µm (325 mesh) via wet laser diffraction

<sup>b</sup> Unless noted

<sup>c</sup> HDH – wrought: Hydride-dehydride process from wrought raw materials; HDH – sponge: Hydride-dehydride process from sponge raw material

### 2.3 Key Selection Criteria

- Use coarser pure titanium powders such as Metco 4010E or Metco 4010D and titanium alloy powders such as Metco 4030A or Metco 4030B to produce coatings with very high surface roughness and porosity. These types of coatings are often desirable for biomedical implant applications because the porous structure is believed to promote bone growth onto the implants.
- Use fine powders such as Metco 4010C to produce relatively smooth and dense coatings. These types of coatings may be suitable for applications requiring corrosion resistance.
- Grade 4 and Grade 5 titanium powders are recommended for use in biomedical applications.
- For some biomedical applications, layers of both the fine and the coarse powders may be applied serving different functions.

## 2.4 Recommended Processes

The table below indicates recommended use for each product; however, for specific applications, customers can choose to use the products for other processes.

Product	ChamPro	Cold Spray	MIM	HIP
Metco 4010A	✓			
Metco 4010C	✓	✓		
Metco 4010D	✓			
Metco 4010E	✓			
Metco 4016A	✓			
Metco 4016B	✓			
Metco 4016D	✓	✓	✓	✓
Metco 4016F	✓			
Metco 4030A	✓			
Metco 4030B	✓			
Metco 4030C	✓			

## 2.5 Specifications

Grade	Products	Specification
CP Ti Grade 4	Metco 4010 series	ASTM F1580
	Metco 4016 series	
Ti 6Al 4V Grade 5	Metco 4030 series	ASTM F1580 SAE International AMS 4998

## 3 Coating Information

### 3.1 Key Thermal Spray Coating Information

Application in inert or vacuum atmospheres are recommended to prevent excessive fuming and oxidation that can have an undesirable affect the coating microstructure and properties and to avoid hazardous conditions.

### 3.2 Cold Spray Applications

Highly porous and very low density titanium powders can be used to produce cold spray coatings with extremely low internal coating porosity.

### 3.3 Coating Parameters

Please contact your Oerlikon Metco Account Representative for parameter availability. For specific coating application requirements, the services of Oerlikon Metco's Coating Solution Centers are available.

## 4 Commercial Information

### 4.1 Ordering Information and Availability

Product	Order No.	Package Size	Availability	Distribution
Metco 4010A	1098594	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4010C	1101155	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4010D	1101156	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4010E	1096845	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4010E	2415239	1.5 kg (approx. 3.3 lb)	MTO	Europe
Metco 4016A	1060305	1.5 kg (approx. 3.3 lb)	MTO	Global
Metco 4016B	1072415	2.5 kg (approx. 5.5 lb)	Stock	Global
Metco 4016D	1302025	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4016F	2383183	2.5 kg (approx. 5.5 lb)	Stock	Global
Metco 4030A	1099885	10 lb (approx. 4.5 kg)	Stock	Global
Metco 4030B	1099886	10 lb (approx. 4.5 kg)	Stock	Global
Metco 4030C	1101159	1.5 kg (approx. 3.3 lb)	Stock	Global

### 4.2 Handling Recommendations

- Store in the original container in a dry location.
- Open containers should be stored in a drying oven below 38°C (100 °F) to prevent moisture pickup.
- Tumble contents prior to use to prevent material segregation.

### 4.3 Safety Recommendations

See the SDS (Safety Data Sheet) localized for the country where the material will be used. SDS are available from the Oerlikon Metco web site at [www.oerlikon.com/metco](http://www.oerlikon.com/metco) (Resources – Safety Data Sheets).

Product	SDS No.
Metco 4010A	50-2241
Metco 4010C	50-2241
Metco 4010D	50-2303
Metco 4010E	50-2303
Metco 4016A	50-2246
Metco 4016B	50-2303
Metco 4016D	50-2810
Metco 4016F	50-2303
Metco 4030A	50-1078
Metco 4030B	50-1078
Metco 4030C	50-1078

Information is subject to change without prior notice.