

# Material Product Data Sheet

## Yttrium Oxide Thermal Spray Powder

**Powder Products:**  
**Metco™ 6035A**

### 1 Introduction

Yttrium oxide is a highly stable compound with a high melting point and is very inert chemically. Yttrium oxide is also known to possess excellent plasma-etch and erosion resistance, particularly in plasmas containing halogen species. In addition, yttrium oxide exhibits excellent electrical insulation (volume resistivity and dielectric breakdown strength).


Yttria coatings used on chamber walls and tooling for semiconductor manufacturing, which are typically applied by atmospheric plasma spray, must be of high purity, highly resistant to etching and erosion, and generate minimal particulates. This requires coatings with high density, hardness and homogeneity. Oerlikon Metco's yttrium oxide powders have a smoothly-surfaced, spherical morphology and a tightly controlled particle size distribution. Superior flow and injection characteristics during plasma spraying allows complete melting of the powder particles resulting in a dense, uniform and smooth coating formation with high electrical insulation and corrosion resistant properties.

Yttrium oxide coatings are also stable at high temperatures and resistant to many reactive molten metals. For these reasons, coatings of yttrium oxide are suitable for plasma-exposed surfaces in semiconductor device manufacturing systems as well as a number of other applications.

#### 1.1 Typical Uses and Applications

- Plasma etch and erosion resistance on surfaces exposed to reactive plasma gases in semiconductor manufacturing systems, such as vacuum chamber walls and other components
- Electrostatic chucks
- Linings for graphite molds

<b>Quick Facts</b>	
Classification	Ceramic, yttria
Chemistry	Y <sub>2</sub> O <sub>3</sub>
Manufacture	Agglomerated or agglomerated and sintered
Morphology	Spheroidal
Apparent Density	1.5g/cm <sup>3</sup>
Service Temperature	≤ 2000 °C (3630 °F), lower in reducing environments
Melting Point	2425 °C (4397 °F)
Purpose	Plasma etching / erosion resistance, electrical insulation, thermal / chemical resistance
Process	Atmospheric Plasma Spray

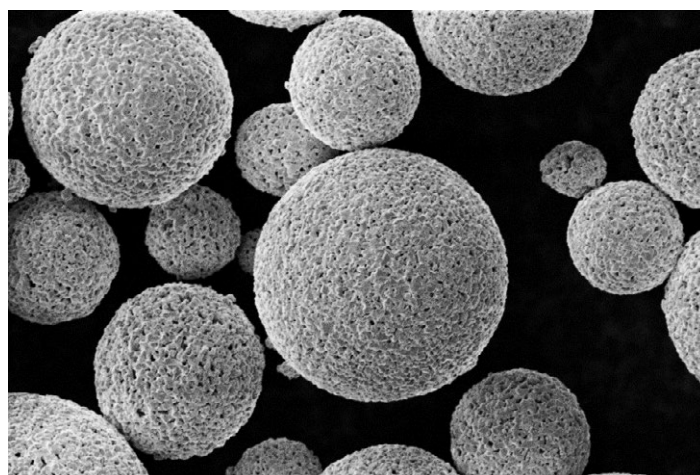

## 2 Material Information

### 2.1 Chemical Composition (typical analysis)

Product	Y <sub>2</sub> O <sub>3</sub> wt. % min.	Fe	Na	Mg	Al	Si	K	Ca	Organics wt. %
Metco 6035A	99.99	<10	3	3	10	10	10	10	–

### 2.2 Particle Size Distribution and Other Physical Characteristics

Product	Nominal Particle Size Range (µm)	Color	Typical Apparent Density (g/cm <sup>3</sup> )	Manufacturing Method	Phase Composition
Metco 6035A	–53 +15	White	1.5	Agglomerated & Sintered	Cubic Ytria

Upper particle size analysis using sieve in accordance with ASTM B214; lower size analysis using laser diffraction (Microtrac)

### 2.3 Key Selection Criteria

- Metco 6035A is a premium product. With its very low levels of trace impurities and its suitable electrical, thermal, mechanical and chemical properties, Metco 6035A produces coatings that provide superior performance when applied to surfaces exposed to reactive plasma for systems used for manufacturing semiconductor devices.

### 2.4 Related Products

- Oerlikon Metco also offers a wide range of metal and metallic thermal spray powders that can be used as bond coats for ceramic coatings. Please search our Thermal Spray Materials Guide or ask your Oerlikon Metco sales representative assistance.

### 3 Coating Information

#### 3.1 Key Thermal Spray Coating Information

Specification	Typical Data for Metco 6035A	
Recommended Process	Atmospheric Plasma Spray	
Deposition Efficiency	43 % – 45 %	
Surface Profile As Sprayed (Ra)	3.8 – 5.1 µm	150 – 200 µin
Macrohardness	92 HR15T	
Dielectric Strength @ 25 °C	16 – 20 kV/mm	410 – 500 V/mil
Volume Resistivity @ 25 °C	> 10 <sup>12</sup> Ω·cm	

#### 3.2 Coating Parameters

Please contact your Oerlikon Metco Account Representative for parameter availability. For specific coating application requirements, the services of Oerlikon Metco's Coating Solution Centers are available.

#### Recommended Atmospheric Plasma Spray Guns

Metco F4 series

SinplexPro series

TriplexPro series

### 4 Commercial Information

#### 4.1 Ordering Information and Availability

Product	Order No.	Package Size	Availability	Distribution
Metco 6035A	1088319	2 kg (approx. 4.4 lb)	Stock	Global

#### 4.2 Handling Recommendations

- Store in the original container in a dry location.
- Tumble contents prior to use to prevent segregation.
- Open containers should be stored in a drying oven to prevent moisture pickup.

#### 4.3 Safety Recommendations

See the correct SDS (Safety Data Sheet) for the product of interest localized for the country where the material will be used. SDS are available from the Oerlikon web site at [www.oerlikon.com/metco](http://www.oerlikon.com/metco) (Resources – Safety Data Sheets).

Product	SDS No.
Metco 6035A	50-1179

Information is subject to change without prior notice.