

## E-Fill 2701

### 60% Nickel Coated Graphite


### 60Ni / C40 — Conductive Grade

The shielding effectiveness of Oerlikon Metco's E-Fill™ 2701 is comparable to that of silver plated materials at a fraction of the cost.

Oerlikon Metco's specialized EMI/RFI shielding material, E-Fill 2701, is optimized for use in extruded, molded and sheet gasket applications where a lower density filler is desired.

E-Fill 2701 excels in applications where coated flanges are used. The angular shape of E-Fill 2701 coupled with Oerlikon Metco's proprietary hard nickel coating give gaskets the "bite" needed to ensure optimal electrical contact.

Oerlikon Metco's aluminum compatible E-Fill 2701 offers enhanced galvanic corrosion resistance and stability in severe environments.

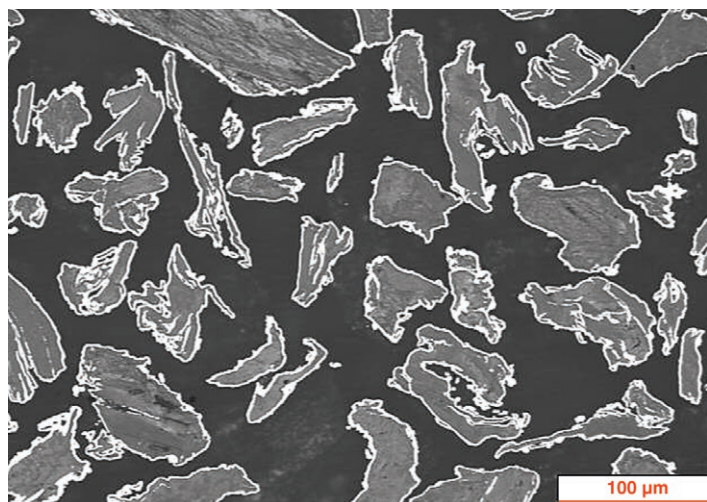

#### Screen Analysis

Tyler Mesh Size	Typical Value % by Mass
+100	0
-100 +140	8 max.
-140 +200	45
-200 +230	25
-230	35 max.
-325	5 max.
-325 +400	< 2
-400	< 3

#### Additional Information

Volume Resistivity	< 0.8 mΩ·cm
True Particle Density	4.0 g/cm <sup>3</sup> typical
Apparent Density Hall (ASTM B212)	1.25 to 1.35 g/cm <sup>3</sup> typical
Standard Packaging	25 kg net in plastic pails
Safety Datasheet (SDS)	50-1291

#### Ordering Information and Availability

	Order No.	Package Size	Availability	Distribution
E-Fill 2701	1043575	25 kg (approx. 55 lb)	Special Order	Global

Information is subject to change without prior notice.